

PBR™ Panel

Steel Roofing and Siding Panel

Description

The Everlast PBR™ Panel is designed for both roofing and siding applications. This panel is excellent for most any exterior use, including industrial, commercial, and agricultural applications. The PBR™ Panel can also be used as an interior liner panel.

Advantages of PBR™ Panels

- Thicker steel eliminates “oil canning” and purlin see-through
- Fluoropon® chalk and fade resistance
- Greater snow and wind yields, and hail resistance

UL Ratings


- UL 2218 Class 4 IMPACT RESISTANCE
- UL 790 Class A FIRE RESISTANCE

Roofing and Siding Applications

- Commercial
- Industrial
- Agricultural

Standard Specifications

- 26-gauge (.018) Structural Steel Grade 80 produced in conformance with ASTM792
- 50,000 PSI minimum yield
- Fluoropon® Paint System
- 1 1/4” major rib height
- 36” cover width
- Custom cut to the inch up to 40’ feet
- Available in a wide variety of colors
- 1:12 recommended minimum roof pitch
- 35-year finish warranty
- 25-year perforation warranty

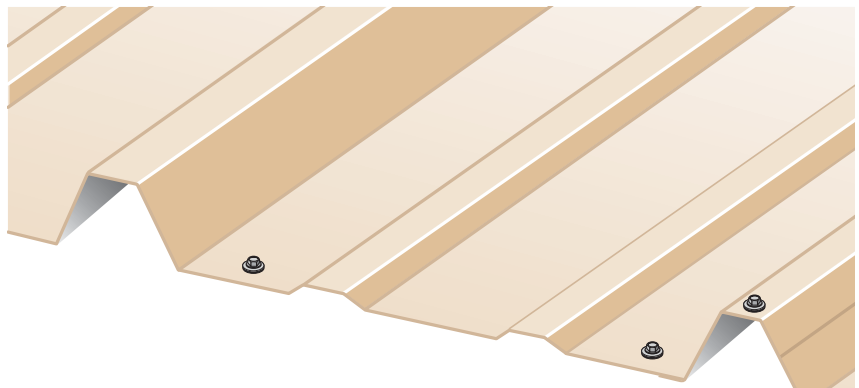

Profile Options

