

Everlast II GALFAN GF90 Series

Steel Roofing and Siding Panel for Agricultural

Description

True 29-gauge GF90 substrate, which is equivalent to a G180 with the Ceram-A-Star® 1050 Matte Paint System. Deeper minor rib heights combined with thicker steel create a stonger, more durable panel. Available in the Everlast II and Everdrain profile.

Result: a steel panel system engineered for easier handling and installation, exceptional strength and distinctive esthetic appeal taking your product into the next generation.

Advantages of Everlast II GALFAN GF90 Panels

- Chalk and fade resistance
- Greater snow and wind yields and hail resistance
- Highly resistant to UV rays, acid rain, salt spray, and abrasion

UL Ratings


- UL construction No# 560 UPLIFT TEST
- UL 2218 Class 4 IMPACT RESISTANCE
- UL 790 Class A FIRE RESISTANCE

Roofing and Siding Applications

- Agricultural

Standard Specifications

- 29-gauge (.015) Structural Steel Grade 80 produced in conformance with ASTM792
- 95,000 PSI minimum yield
- GF90 substrate equivalent to G180
- Ceram-A-Star® 1050 Matte Paint System
- Heat-formed panels with 3/4" major rib height; 3/16" minor rib height
- 36" cover width
- Custom cut to the inch up to 40' feet
- Available in a wide variety of colors
- 3:12 recommended minimum roof pitch
- Cut panels coated with CECI™

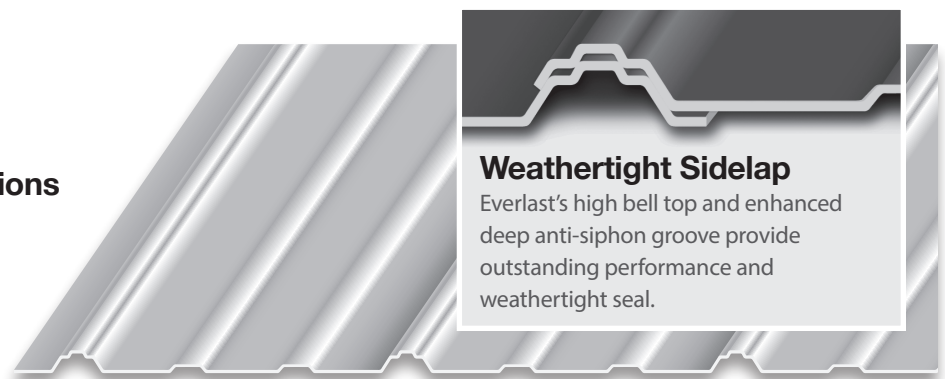

Weathertight Sidelap

Everlast's high bell top and enhanced deep anti-siphon groove provide outstanding performance and weathertight seal.

